

Product Data sheet : Current Transformer- CT1077

Date : 06.08.2010


Rev : 02

Page 1 of 1

Customer: Standard Type

Customer's part No.: ---

MECHANICAL DIMENSIONS

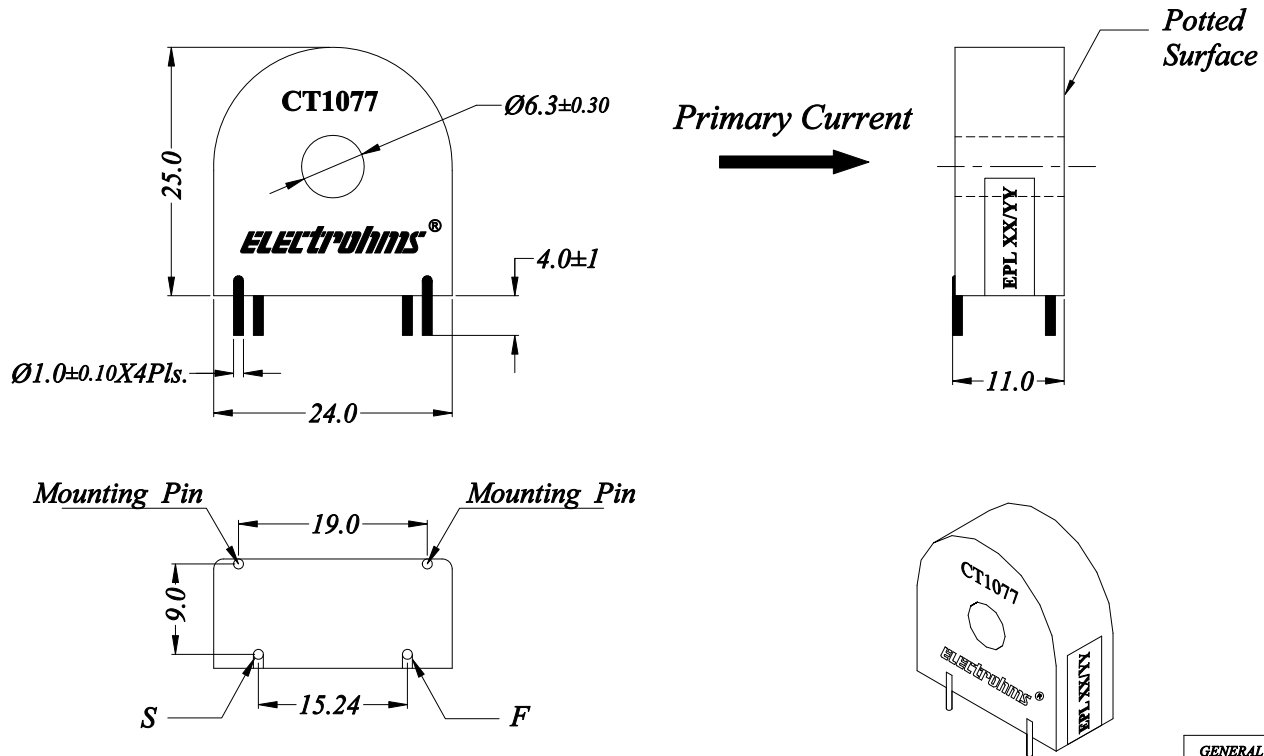

Termination:- F : Finish, S : Start

GENERAL TOL. ±0.5 mm	
ALL DIMENSIONS ARE IN 'mm'	SCALE - NTS

FEATURES :

- Low cost CT for class 1 whole Current Application.
- Encapsulated & P.C. Mountable.

SPECIFICATIONS **

PARAMETERS	VALUES
Current Range	0.25 – 20 Arms
Frequency of Operation	50/60 Hz
D C R@ 25°C	130-160 Ω
Turns Ratio	1 : 2500
Recommended Secondary Burden	30.0 Ω (Resistive)
Amplitude Error	<1.0%
Phase Error	<0.5°
Inductance @, 0.3Vrms, 100Hz, Lp	≥65H
Operating Temperature Range	- 10 °C to + 60 °C.

** Specifications subject to change.

Note :

Amplitude error and Phase error values are guaranteed with recommended Secondary burden. Refer to ELECTROHMS Product Design Group for use of burden other than recommended Secondary burden.