




$I_{pn} = 40A$

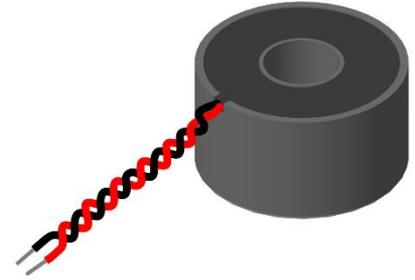

Representative image only

Features

- -----

Advantage

- -----

Applications

- Relay application.

Application domain


- Commercial
- Industrial

Specifications @ 25°C

Parameters	Symbol	Value	Units
Primary current range	I_p	1 - 40	Arms
Operating frequency	Hz	50/60	Hz
Half sine wave rectified, current amplitude	----	---	---
Secondary turns	N_s	1000	
Secondary winding resistance	R_s	36 - 46	Ω
Recommended secondary burden resistance	R_b	100	Ω
Amplitude error	AE	---	%
Phase error	PE	---	$^\circ$
Inductance @ 0.3Vrms, 100Hz,	L	---	H
Operating temperature range	T_{opr}	-10 to +60	$^\circ C$
Storage temperature range	T_{stg}	-10 to +60	$^\circ C$
Dielectric strength between rod inserted in the opening primary and secondary terminal @ 50Hz, 60 Seconds	V_d	2.5	kVrms
Mass	m	21	g

Amplitude error (AE) and phase error (PE) values are guaranteed with recommended secondary burden resistance values. Contact ELECTROHMS design group for use of burden other than recommended secondary burden resistance.

Mechanical dimensions

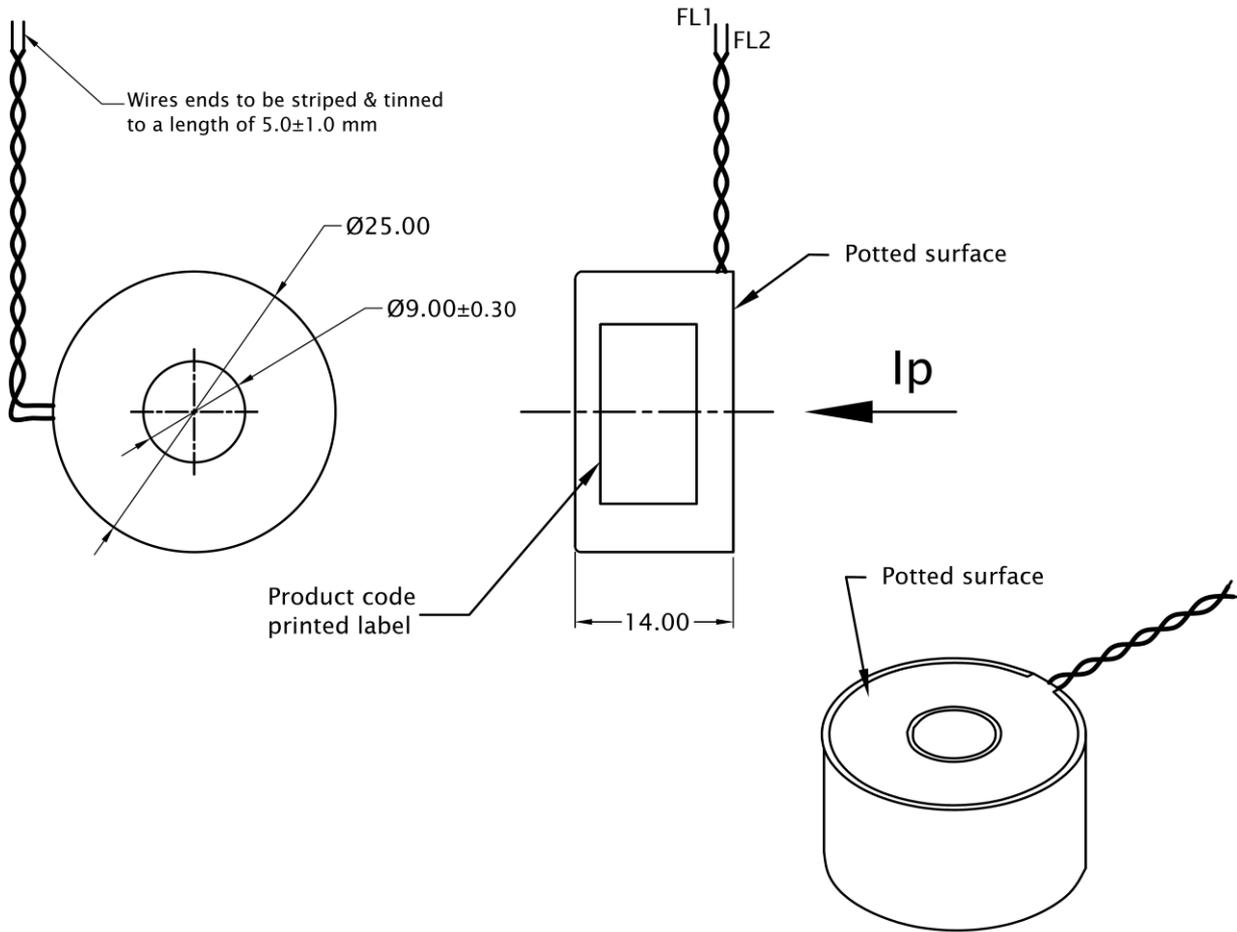

Tolerance unless otherwise specified

0.5 up to 3 in mm	>3 up to 6 in mm	>6 up to 30 in mm	>30 up to 120 in mm	>120 up to 400 in mm	>400 up to 1000 in mm	ALL DIMENSIONS ARE IN 'mm'	
± 0.20	± 0.30	± 0.50	± 0.80	± 1.20	± 2.0	SCALE -NTS	

Termination Details

S (Start FL1)	PVC wire 7X0.2mm, 24AWG, Red, 200 +/-5.0mm Length.
F (Finish FL2)	PVC wire 7X0.2mm, 24AWG, Black, 200 +/-5.0mm Length.

Notes:

- The start & finish of the CT will be as shown in the figure, when primary current flows in the direction of arrow.
- Also available with UL approved materials on request.

Safety



- When operating the current transformer, primary busbar can carry hazardous voltage.
- Risk of electrical shock when current transformer is operated with secondary in open condition with primary winding energised.

General information

Electrohms reserves the right to make modifications on products for improvements without prior notice.