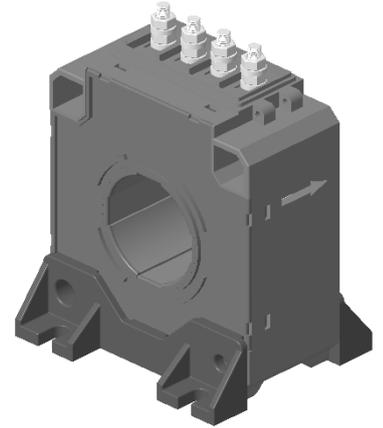


 $I_{pn} = 1300A_{rms}$ 

Representative image only

Features

- Plastic outer case compliant to UL 94-V0

Advantage

- Very good linearity
- Excellent accuracy
- Low temperature drift
- Wide frequency bandwidth
- Optimized response time
- High immunity to external interference
- No insertion losses
- Current overload capability

Applications

- AC variable speed drives and servo motor drives
- Static converters for DC motor drives
- Battery supplied applications
- Uninterruptible power supplies (UPS)
- Switched mode power supplies (SMPS)
- Power suppliers for welding applications

Application domain

- Commercial
- Industrial
- Railways

Standards


- EN50178
- EN50155
- UL508*

Insulation Characteristics






Parameters	Symbol	Value	Units
Dielectric strength between primary and secondary terminals, 50Hz, 60 seconds	V_d	13.4	kVrms
Dielectric strength between shield and secondary terminals, 50Hz, 60 seconds.	V_d	1.5	kVrms
Comparative tracking index	CTI	250	V
Insulation resistance at 500 VDC	R_{is}	> 100	MΩ
Creepage distance		66.50	mm
Clearance distance		45.60	mm

Specifications (Unless otherwise specified temperature is 25°C)

Parameters	Symbol	Condition	Min	Typ	Max	Units
Input current nominal	I_{pn}			1300		Arms
Input current measuring range	I_p		-2800		+2800	A
Burden resistance	R_b	with $\pm 21V, \pm 1900A$	0		14	Ω
		with $\pm 21V, \pm 2700A$	0		2	Ω
Secondary winding resistance	R_s			22		Ω
Output current at I_{pn}	I_{out}			325		mA
Number of secondary turns	N_s			4000		
Theoretical sensitivity	G_{th}			0.25		mA/A
Supply voltage	V_s		± 21		± 24.1	V
Current consumption	I_c	$V_s = \pm 24V$		$30 + I_{out}$		mA
Offset current	I_o		-0.5		+0.5	mA
Temperature variation of I_o	I_{ot}	-40 to +75°C	-1		+1	mA
Linearity error	Σ_L			< 0.1		%
Overall accuracy at I_{pn}	X_G	-40 to +75°C	-0.4		+0.4	%
			-0.8		+0.8	%
Response time at 90% of I_{pn}	t_r	di/dt of 100 A/ μ s		< 1.0		μ s
Frequency bandwidth	BW	-3dB, small signal bw	0		100	kHz
di/dt accurately followed	di/dt			> 100		A/ μ s
Ambient operating temperature	T_A		-40		+75	°C
Ambient storage temperature	T_s		-50		+90	°C
Mass	m			1.100		kg

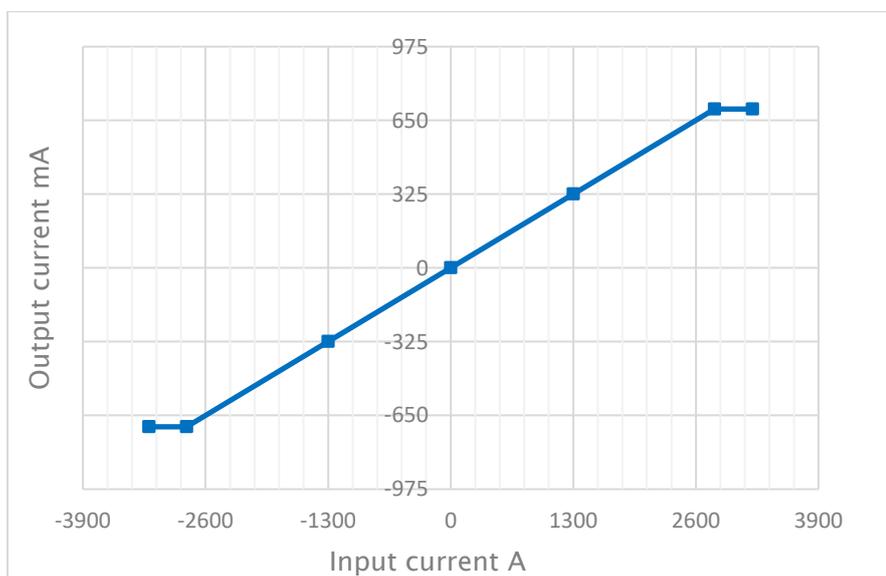Input & Output Characteristics


Mechanical dimensions

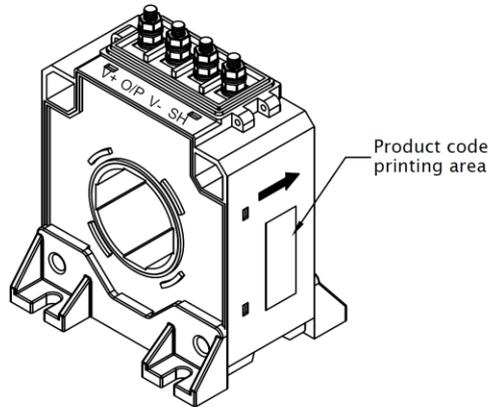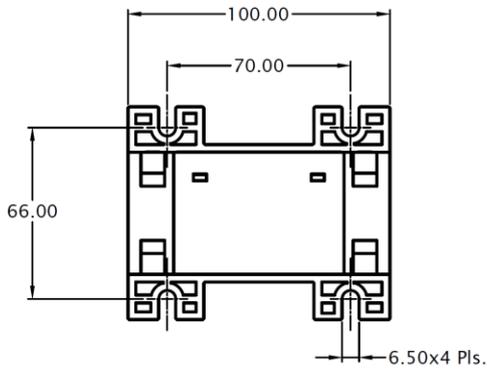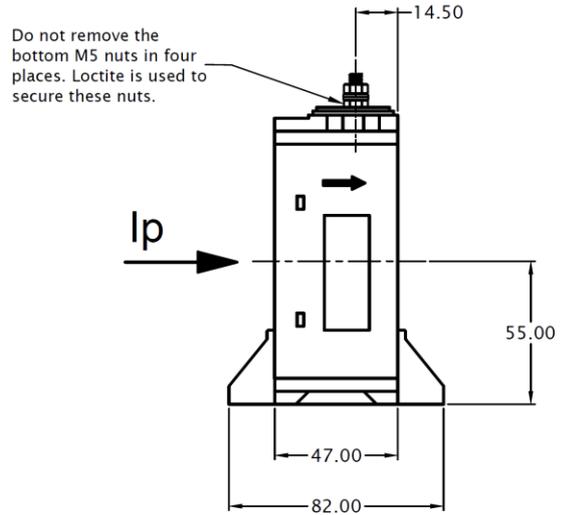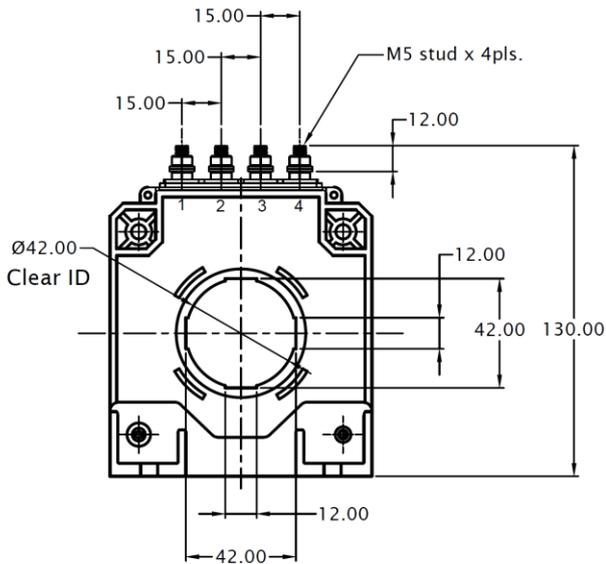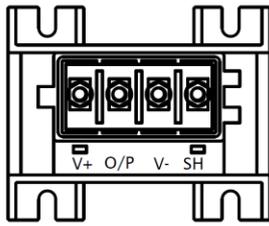

Tolerance unless otherwise specified

0.5 up to 3 in mm	3 up to 6 in mm	6 up to 30 in mm	30 up to 120 in mm	120 up to 400 in mm	400 up to 1000 in mm	ALL DIMENSIONS ARE IN 'mm'	
± 0.20	± 0.50	± 1.0	± 1.50	± 2.50	± 4.0	SCALE -NTS	

Connection Diagram

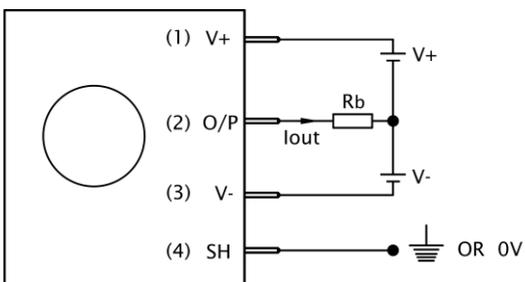

- Connector on the product: M5 studs.
- Secondary connection M5 studs in 4 places, recommended fastening torque 2.2 N-m.
- Sensor mounting: 4 slots X Ø 6.5mm, M6 steel screws, recommended fastening torque 4.6 N-m.
- It is recommended to centrally locate the current carrying conductor or completely fill the central opening for optimum performance.
- Output is positive when current (I_p) flows in the direction of arrow.
- Ensure proper connection of power supply to avoid damage to the sensor.
- * Designed to meet UL508.

Safety



- This Sensor must be used in electric/electronic equipment with respect to applicable standards and safety requirements in accordance with the manufacturer's operating instructions.



- Caution, risk of electrical shock
- When operating the Sensor, certain parts of the module can carry hazardous voltage (eg. primary busbar, power supply).
- Ignoring this warning can lead to injury and/or cause serious damage.
- A protective housing or additional shield could be used.
- Over currents ($\gg I_{pn}$) can cause an additional voltage offset due to magnetic remanence.
- The temperature of the primary conductor shall not exceed 100 °C.
- This Sensors must be used in electrical or electronic systems as per the applicable standards.
- Protect non-isolated high-voltage current carrying parts against direct contact (e.g. with a protective housing)
- When installing the sensor, ensure that the safe separation (between primary circuit and secondary circuit) is maintained over the whole circuits and their connections.

General information:

Electrohms reserves the right to make modifications on products for improvements without prior notice.