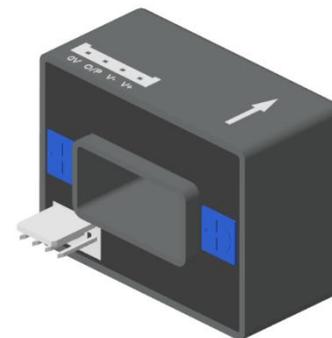


$I_{pn} = 50 \dots 600A$ 

Features

- Low amplitude error & phase error
- Isolated plastic case recognized according to UL 94-V0

Advantage

- Very good linearity
- Low temperature drift
- Optimized response time
- Current overload capability

Applications

- AC variable speed drives and servo motor drives
- Static converters for DC motor drives
- Battery supplied applications
- Uninterruptible power supplies (Ups)
- Switched mode power supplies (SMPS)
- Power suppliers for welding applications

Application domain

- Commercial
- Industrial

Standards

- EN 50178
- UL508

Insulation Characteristics

Parameters	Symbol	Value	Units
Dielectric strength between primary and secondary terminals, 50Hz, 60 seconds	V_d	3.5	kV
Comparative tracking index	CTI	250	V
Insulation resistance at 500 VDC	R_{IS}	>1000	MΩ
Creepage distance		7.00	mm
Clearance distance		4.50	mm


Product Range

Product Code	Primary Nominal Current (I_{pn})	Primary Measuring Range (I_p)
HS050T01	50A	$\pm 150A$
HS100T01	100A	$\pm 300A$
HS200T01	200A	$\pm 600A$
HS300T01	300A	$\pm 900A$
HS400T01	400A	$\pm 900A$
HS500T01	500A	$\pm 900A$
HS600T01	600A	$\pm 900A$

Primary measuring range for momentary only





Specifications (Unless otherwise specified temperature is 25°C)

Parameters	Symbol	Condition	Min	Typ	Max	Units
Burden resistance	R_b		10			k Ω
Output voltage	V_{out}	at $\pm I_{pn}$, $R_b = 10k\Omega$,		± 4.0		V
Supply voltage ($\pm 5\%$)	V_s	operating at 12V reduces the measuring range		± 15		V
Current consumption at I_{pn}	I_{out}			15		mA
Overall accuracy) at I_{pn} (Excluding offset)	X_G			± 1		%
Linearity error (Excluding offset)	Σ_L	-10 to +85 °C		<1		%
Output offset voltage	V_{off}			± 20		mV
Hysteresis offset voltage	V_{OH}	at $I_p = 0$ after a primary current of I_{pn}		± 20		mV
Temperature coefficient of V_{out} (HS050T01)	TV_{OE}	-10 to +85 °C		± 2.0		mV/K
Temperature coefficient of V_{out} (HS100...600T01)				± 1.0		
Response time at 90% Of I_{pn}	τ_{ra}			3		μs
Frequency bandwidth	BW	-3dB, small signal bw	DC		50	kHz
di/dt accurately followed	di/dt			>50		A/ μs
Ambient operating temperature	T_A		-10		+80	°C
Ambient storage temperature	T_S		-25		+80	°C
Mass	m			70		g

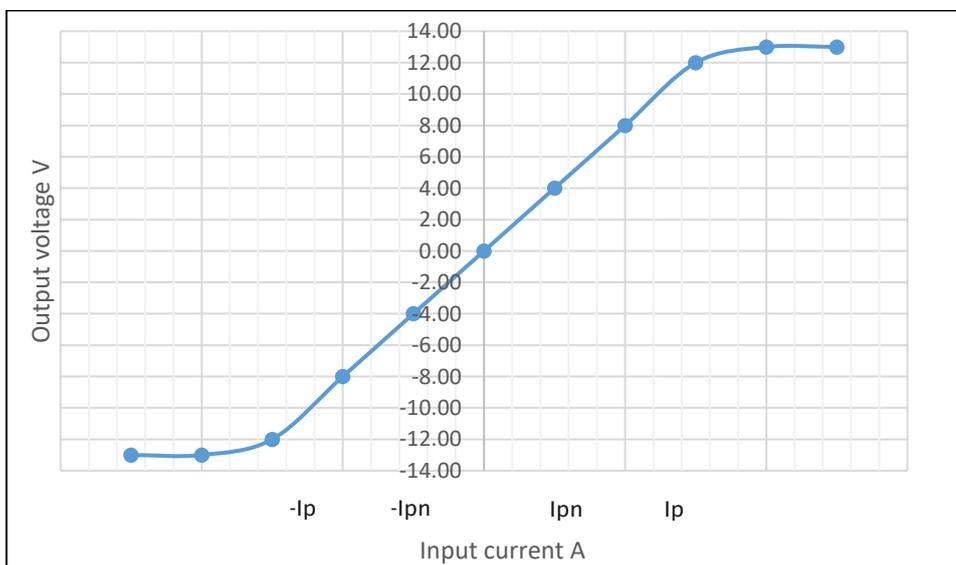
Input & Output Characteristics

Mechanical dimensions

GENERAL TOL. ± 0.50 mm	
ALL DIMENSIONS ARE IN 'mm'	SCALE - NTS

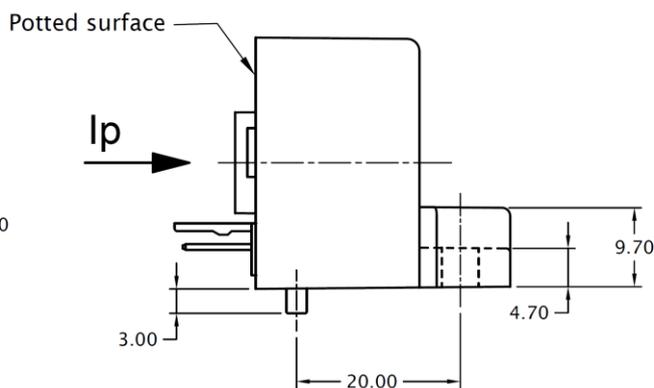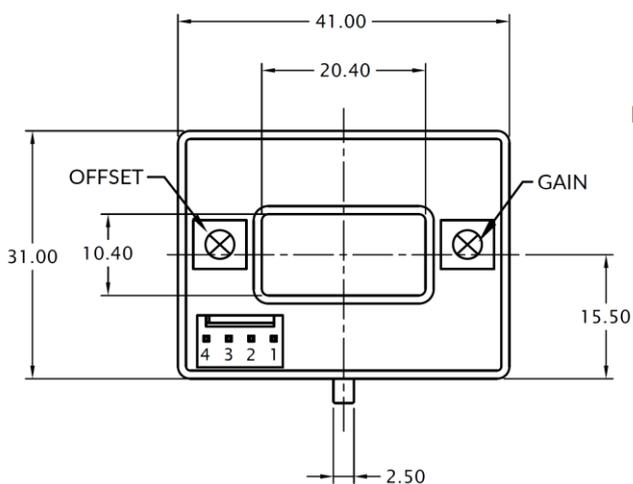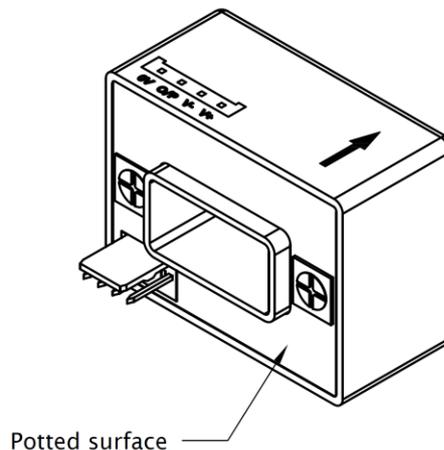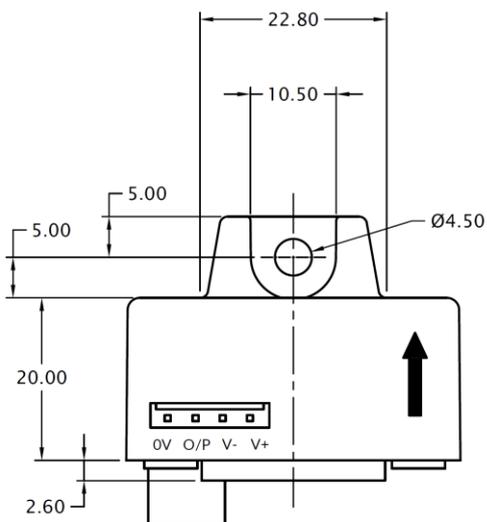

Connection Diagram

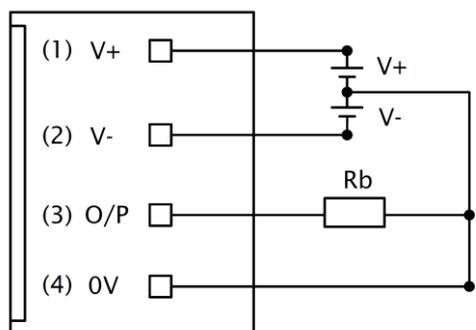

- Connector on the product: Connector header, part no-22-04-1041, Molex
- Suggested mating connector: Connector housing, part no-22-01-1042, & corresponding pin part no: 08-50-0114, Molex
- Sensor mounting: Hole Ø 4.5mm, M4 steel screws, recommended fastening torque 3 N-m
- It is recommended to centrally locate the current carrying conductor or completely fill the central opening for optimum performance
- Output is positive when current (I_p) flows in the direction of arrow
- Ensure proper connection of power supply to avoid damage to the sensor

Safety



- This Sensor must be used in electric/electronic equipment with respect to applicable standards and safety requirements in accordance with the manufacturer's operating instructions.



- Caution, risk of electrical shock
- When operating the Sensor, certain parts of the module can carry hazardous voltage (eg. primary busbar, power supply).
- Ignoring this warning can lead to injury and/or cause serious damage.
- A protective housing or additional shield could be used.
- Disconnecting the main power must be possible
- Over currents ($\gg I_{PN}$) can cause an additional voltage offset due to magnetic remanence.
- The temperature of the primary conductor shall not exceed 100 °C.
- This Sensors may only be used in electrical or electronic systems which fulfil the relevant regulations (Standards, EMC Requirements)
- Pay attention to protect non-isolated high-voltage current carrying parts against direct contact (e.g. with a protective housing)
- When installing the sensor, ensure that the safe separation (between primary circuit and secondary circuit) is maintained over the whole circuits and their connections.

General information:

Electrohms reserves the right to make modifications on products for improvements without prior notice.